
Wall insulation Uninsulated wall








Self-tapping, stainless screw with self-vulcanizing seal



Steel plate VP45, thickness 0,5 mm, with hot-dip zinc coating (275 g/m 2), painted (ext. 25 μ m, int 15 μ m)

Foundation drip edge, thickness 0,5 mm, with hot-dip zinc coating (275 g/m²), painted (ext. 25 μ m)

Profiled sealing

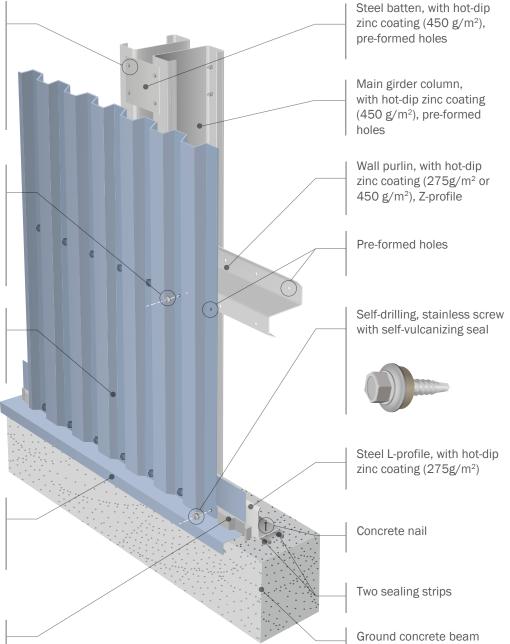

Certificate



